

# Clippard

## DR-2 Precision Regulators

*Excellent Accuracy & Repeatability*




- Design for applications where zero air consumption is required (non-bleed)
- Excellent corrosion resistance
- Relieving and non-relieving designs
- Manifold mount option
- Features non-rising internal adjustment
- ISO 9001:2008

When Clippard invented miniature regulators in 1962, the MAR Series became very popular as a simple, robust, and cost-effective regulator in a small package with exceptionally long life.

As regulator applications continue to increase, Clippard is meeting the demand with the newest addition to the reputable regulator line. The new DR-2 Series provides greater accuracy and repeatability while maintaining the same flow and performance characteristics as the MAR regulators in a durable, sleek package.

Regulators are offered in either relieving or non-relieving versions. The relieving design maintains a constant pressure output even when downstream conditions change, while non-relieving regulators do not automatically compensate for changes in downstream flow or pressure. There is no vent to atmosphere, as in a relieving type regulator, and the output pressure can increase due to a downstream event. Non-relieving versions can also accommodate compatible liquid applications.

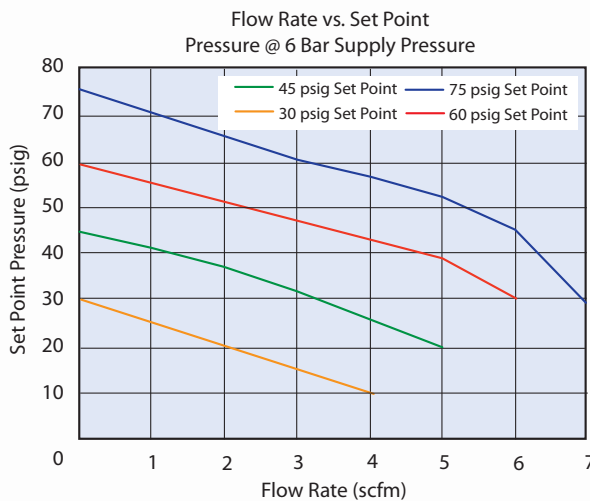

*The DR-2 Series is not recommended for applications where dead-end, no flow is required.*

### Specifications

<b>Medium</b>	Air, Water* or Oil*
<b>Input Pressure</b>	300 psig max.
<b>Repeatability</b>	± 0.15 psi
<b>Set Point Sensitivity</b>	0.1 psi
<b>Set Point Stability</b>	0.1 psi
<b>Temperature Range</b>	32 to 230°F
<b>Mounting</b>	#15/32-32 thread. Nuts and lockwashers furnished
<b>Material</b>	Electroless nickel plated brass body, FKM seals, PFPE lube, stainless steel adjustment screw and spring
<b>Adjustment</b>	An extended 0.25" shaft accepts an adjustment knob, or furnished with an exposed screwdriver slot with micro-adjustment (32 pitch thread). Knobs ordered separately (#AK4-A)

\* Non-Relieving models only

### Order Information

Inlet	Outlet	Base Part No.
#10-32 Female	#10-32 Female	DR-2
1/8" NPT Male	#10-32 Female	DR-2P
#10-32 Male	Manifold	DR-2M
Cartridge	Cartridge	DR-2C
1/8" NPT Male	1/8" NPT Female	DR-2BP

Example Part No.: DR-2BP-5

Special configurations, preset options and metric versions available. Consult Clippard.



Type

(blank) Relieving  
NR Non-Relieving



Max. Pressure Range



(blank) 2 - 100 psig  
-1 0.5 - 10 psig  
-5 1 - 50 psig



## Clippard Instrument Laboratory, Inc.


7390 Colerain Avenue • Cincinnati, OH 45239 • 513-521-4261 • 877-245-6247 • Fax 513-521-4464 • www.clippard.com

Technical Data Bulletin 7.16

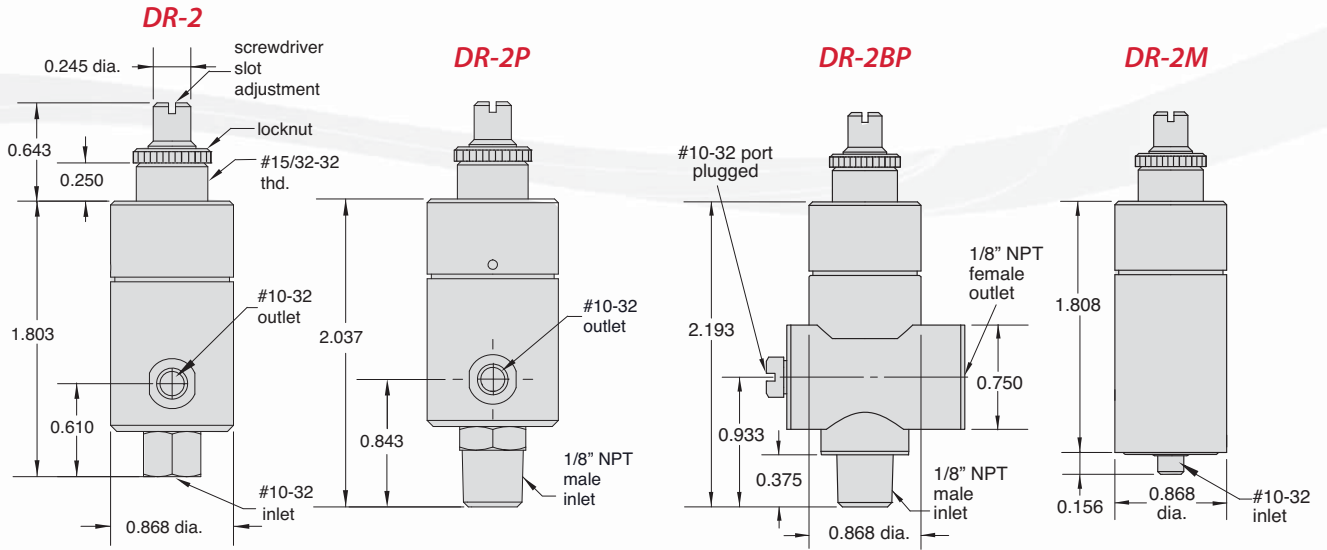

All models illustrated with screwdriver slot adjustment

**DR-2C**

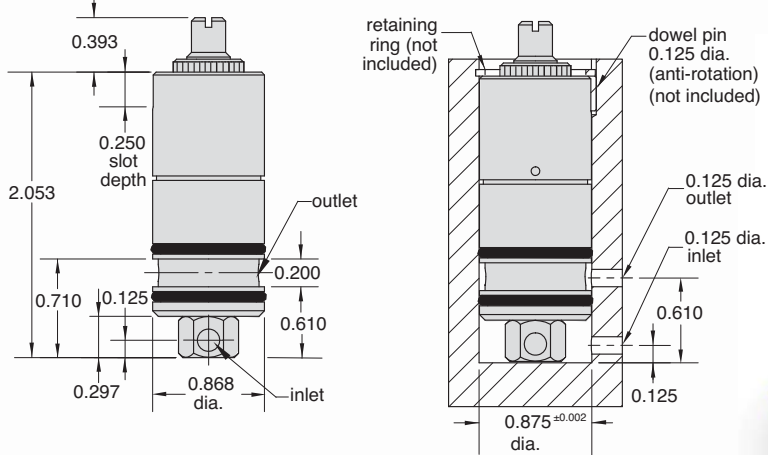

**CUSTOMer**  
solutions



Professionally Distributed by:

Special Body Configuration

Customer Special Cartridge Configuration

**Custom Regulators**

*Special Configurations & Assemblies*

If you need a product that fits your application perfectly, Clippard has the capability to design or modify one of its products to suit your exact needs. We understand that a standard catalog product may be close but not be exactly what you need. We have the ability and capacity to give you what you want. Our Engineering Department has designed tens of thousands of special variations, modifications or completely special regulators and other products.

Call today with your unique application!

**Clippard Instrument Laboratory, Inc.**

7390 Colerain Avenue • Cincinnati, OH 45239 • 513-521-4261 • 877-245-6247 • Fax 513-521-4464 • www.clippard.com

Technical Data Bulletin 7.16