



## 7 mm 2-Way & 3-Way Electronic Valves



- 1,000,000,000+ cycle life
- · Extremely small dead volume
- · Low vibration and noise
- 100% tested

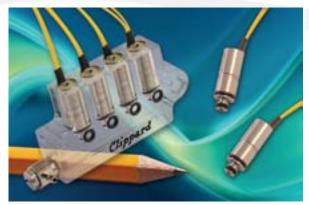

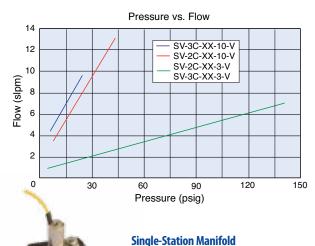

Part No.	Description	
SVM-01	Single-Station Manifold, #10-32	
M-SVM-01	Single-Station Manifold, M5	
SVM-MC	Mounting Clip & Screw Only	

Black anodized aluminum manifold

Other materials available.

comes with mounting clip and screw.

Type	Pressure	Orifice	Part No.	Voltage
2-Way	0 - 145 psig	0.012"	SV-2C-12-3-V	12 VDC
			SV-2C-24-3-V	24 VDC
	0 - 45 psig	0.039"	SV-2C-12-10-V	12 VDC
			SV-2C-24-10-V	24 VDC
3-Way	0 - 144 psig	0.012"	SV-3C-12-3-V	12 VDC
			SV-3C-24-3-V	24 VDC
	0 - 22 psig	0.039"	SV-3C-12-10-V	12 VDC
			SV-3C-24-10-V	24 VDC

These new direct actuating valves offer an extremely fast response time for accurate dosing of minute volumes with the same long life you expect from the original Clippard EV line of electronic valves, now in a 7 mm cartridge package.


Due to very low moving weights, they are extremely quiet and emit very low vibration. Subminiature size and low energy consumption make them ideal for transportable and mobile systems, among others.

Standard products offered will fit the needs of most applications, however this series can be fully customized according to the user's unique requirements. Consult Clippard with your specific application.

## **SPECIFICATIONS**

Valve Type:	2-Way & 3-Way Normally-Closed		
Medium:	Air, Water, Gas & Compatible Fluids		
Nominal Power:	0.5 - 1.2 watts		
Response Time:	<1 ms*		
Temperature Range:	32 to 122°F		
Electrical Connection:	3" Wire Leads		
Voltage:	12 or 24 VDC		
Mounting:	Cartridge		
Weight:	0.14 oz.		
Wetted Materials:	Stainless Steel		
Seal Material:	FKM standard. EPDM available		

 $<sup>\</sup>hbox{\it *Customizable to the specifications of the application. Contact Clippard.}$ 

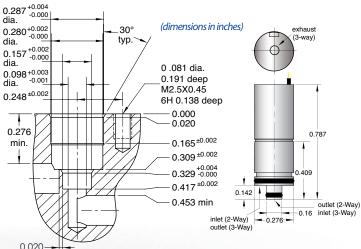

Read more online at clippard.com/link/sv-tds

## **CLIPPARD INSTRUMENT LABORATORY, INC.**